

KBMS Casuarina Boat Harbour Phase 1 DSDMP Water Quality Monitoring



1 November 2024

Monitoring Summary Report 6

Document Information

REPORT NO.	MSA343R02.06
DATE	November 1, 2024
CLIENT	WA Limestone
DOCUMENT TITLE	KBMS Casuarina Boat Harbour Phase 1 DSDMP Water Quality Monitoring. Monitoring Summary Report 6.
USAGE	This report is provided for use as a summary of the data collected during the sixth disposal monitoring campaigns implemented in accordance with the Koombana Bay Marine Structures (KBMS) Dredge Spoil Disposal Management Plan (DSDMP) approved under Ministerial Statement 1226.
KEYWORDS	Bunbury, dredging, dredge spoil, water quality, total suspended sediments
CITATION	MScience 2024. KBMS Casuarina Boat Harbour Phase 1 DSDMP Water Quality Monitoring. Monitoring Summary Report 6. Unpublished report MSA343R02.06 to WA Limestone, Perth Western Australia, pp25

Version History

Version/Date	Issued as	Author	Reviewed	Approved
1/01.11.2024	For client records	IJP	MJF	IJP

Disclaimer

Information in this report is provided solely for the user's information and, while thought to be accurate at the time of publishing, is provided strictly as the best understanding of Marine Science Associates Pty Ltd and without warranty of any kind. Marine Science Associates Pty Ltd, its agents, employees or contractors will not be liable for any damages, direct or indirect, or lost profits arising out of the use of information provided in this report beyond its immediate implications.

Acronyms and Abbreviations

Abbreviation	Definition
BCH	Benthic Communities and Habitats
CBH	Casuarina Boat Harbour
CCL	Cockburn Cement Limited
CEMP	Construction Environmental Management Plan
CoC	Chain of Custody
DCCEEW	Department of Climate Change, Energy, the Environment and Water
DDC	Dolphin Discovery Centre
DoT	Department of Transport (WA)
DSDMP	Dredge Spoil Disposal Management Plan
EP Act	Environmental Protection Act 1986
GIS	Geographical Information System
KBMS	Koombana Bay Marine Structures
KBSC	Koombana Bay Sailing Club
LAT	Lowest Astronomical Tide
Nephelometer	Instrument for measuring turbidity
NTU	Nephelometric Turbidity Units
PAR	Photosynthetically Active Radiation
PSU	Practical salinity unit approximates g/l
QA/QC	Quality Assurance and Quality Control
SDP	Sea Dumping Permit
SI	Surface Irradiance
TSHD	Trailing Suction Hopper Dredge
TSS	Total Suspended Solids – sediment weight/volume in a subsample of water collected
WAL/IS JV	WA Limestone / Italia Stone Joint Venture
ZoI	Zone of Impact
ZoMI	Zone of Medium Impact
ZoHI	Zone of High Impact

CONTENTS

EXECUTIVE SUMMARY	V
1 INTRODUCTION	1
1.1 Project Background	1
1.2 DSDMP Water Quality Monitoring Program.....	1
1.2.1 Intent.....	1
1.2.2 Frequency.....	2
1.2.3 Monitoring locations	2
1.2.4 Analysis.....	2
1.2.5 Test Narrative	2
1.3 Previous Survey.....	5
1.4 Document Purpose.....	5
1.4.1 Structure of this Document.....	5
2 METHODOLOGY	6
2.1 Monitoring Design	6
2.1.1 Monitoring locations	6
2.2 Field Procedures.....	6
2.2.1 Physical Water Quality	6
2.3 Data Analysis and QA/QC	6
3 DISPOSAL MONITORING CAMPAIGN DATA SUMMARY	7
3.1 Dredge Disposal Summary	7
3.2 Metocean Conditions	7
3.3 Physical Water Quality	7
3.3.1 Total Suspended Sediments	7
3.3.2 Turbidity	8
3.3.3 PAR.....	8
3.3.4 Temperature, Conductivity, Dissolved Oxygen	10
4 ASSESSMENT OF TRIGGER EXCEEDANCE AND RECOMMENDATIONS	11
4.1 Exceedance Investigation.....	11
4.2 Response Recommendation	11
5 REFERENCES	12
6 APPENDIX A – YSI CALIBRATION SHEET	A1
7 APPENDIX B – DETAILED WATER QUALITY STATISTICS BY SITE	B1
8 APPENDIX C – VERTICAL PROFILES	C1

TABLES

Table 1-1. DSDMP triggers, tests and responses.....	4
Table 1-2. Previous monitoring campaign summary	5
Table 3-1. Dredge disposal summary for 31 October 2024	7
Table 3-2. Depth- and time-averaged estimates of TSS (mg/L) for all sites.....	8

FIGURES

Figure 1-1. DSDMP water quality monitoring locations	3
Figure 3-2. Turbidity means (time and depth averaged) at sites in the disposal monitoring campaign.....	9
Figure 3-3. Mean percent surface irradiance at sites in the disposal monitoring campaign	9

EXECUTIVE SUMMARY

The Koombana Bay Marine Structures (KBMS) is a Strategic Proposal (Ministerial Statement 1226) approved under Part IV of the *Environmental Protection Act 1986* (EP Act) for the construction and operation of small craft marine infrastructure in Koombana Bay, located in Bunbury, Western Australia.

The Casuarina Boat Harbour (CBH) proposal was approved as a Derived Proposal under the Strategic Proposal. The CBH Proposal includes a dredging and dredge spoil disposal component. Construction is proposed to be completed in two phases.

Capital dredging for Phase 1 of the CBH Proposal is being implemented in accordance with an approved Dredge Spoil Disposal Management Plan (DSDMP). The DSDMP includes a water quality monitoring program at near-disposal, far-disposal and reference locations in the vicinity of the dredge spoil disposal site. Triggers for total suspended sediment (TSS) concentrations have been established in the DSDMP to monitor the accuracy of the disposal plume modelling predictions.

The trailing suction hopper dredge (TSHD), *Modi R*, has most recently conducted dredging operations in Bunbury Harbour for Southern Ports Authority at Outer Harbour and Sand Trap locations from 01-11 October, and at the Department of Transport (DoT) Northern Breakwater from 11-14 October. On 15 October, MODI demobilised from Bunbury Harbour and has been conducting shell sand dredging in Owen Anchorage for Cockburn Cement Limited (CCL). In the absence of the TSHD, dredge operations have continued at the CBH Proposal site via an excavator and hopper barge. Polaris Marine Group (Polaris) operates tug vessel *EDI*, towing the split hopper barge *PM Skippy* to the spoilgrounds for spoil disposal.

A survey was undertaken following the requirements of the DSDMP during a 180 m³ spoil disposal event on 31 October 2024.

NTU data was transformed into estimated TSS values using the relationship:

$$\text{TSS} = 1.62 * \text{NTU}$$

The data collected showed no exceedance of either the Trigger 1 (TSS at a near disposal monitoring site >2 mg/L above the average of the reference site data) or Trigger 2 (TSS at a far disposal monitoring site >2 mg/L above the average of the reference site data) criterion at any site.

Other parameters (temperature, conductivity and dissolved oxygen) showed the water column was well mixed.

No impact to seagrass quality is predicted as a result of the present sampling data, as such, none of the management actions presented in the DSDMP require implementation.

1 INTRODUCTION

1.1 Project Background

The Koombana Bay Marine Structures (KBMS) is a Strategic Proposal (Ministerial Statement 1226) approved under Part IV of the *Environmental Protection Act 1986* (EP Act) for the construction and operation of small craft marine infrastructure in Koombana Bay, located in Bunbury, Western Australia.

The future proposals identified under the Strategic Proposal include the construction and operation of:

- Casuarina Boat Harbour (CBH);
- Koombana Bay Sailing Club (KBSC) marina; and
- Dolphin Discovery Centre (DDC) finger jetty.

The CBH Proposal was approved as a Derived Proposal under the Strategic Proposal. The CBH Proposal includes a dredging and dredge spoil disposal component, a piling component, land reclamation and construction of breakwater and revetment walls. The marine infrastructure includes the construction and operation of a wharf, jetties, boat ramps and boat pens. Construction is proposed to be completed in two phases. The CBH Phase 1 dredge and construction program includes the northern breakwater, associated reclamation area and internal jetties and boat pens.

Capital dredging for Phase 1 of the CBH Proposal will be implemented in accordance with an approved Dredge Spoil Disposal Management Plan (DSDMP) and associated Sea Dumping Permit (SDP) (SD2022/4034) issued under the Commonwealth *Environment Protection (Sea Dumping) Act 1981*, administered by the Department of Climate Change, Energy, the Environment and Water (DCCEEW). Up to 177,000 m³ of capital dredging material is proposed to be disposed offshore at the approved spoil ground during Phase 1.

The approved DSDMP outlines the management and monitoring actions required to minimise the environmental impact of dredge spoil disposal activities associated with construction of the proposals identified under the KBMS Strategic Proposal (Cardno 2023). This report covers the component of the DSDMP's water quality monitoring program at near-disposal, far-disposal and reference locations in the vicinity of the dredge spoil disposal site.

1.2 DSDMP Water Quality Monitoring Program

1.2.1 Intent

- Demonstrate measured total suspended solids (TSS) concentrations (inferred from turbidity [NTU] data using a TSS~NTU relationship) remain within the expected range predicted by sediment plume dispersion modelling (model validation);
- Measure NTU and additional physical water quality parameters within disposal plumes for comparison against background condition (reference sites);
- Inform ongoing spoil disposal activities and any requirement to manage these; and
- Assess potential impacts to benthic community habitats (BCH e.g. seagrass shading) should measurements be outside of the modelled range (trigger exceedance).

1.2.2 Frequency

Monitoring is to be conducted fortnightly for the duration of dredge spoil disposal activities, including a monitoring campaign prior to the start of dredging and two weeks post- disposal activities.

During dredge spoil disposal activities, data will be collected immediately after an individual disposal action and then at three equally spaced periods as the turbid plume disperses, until just prior to the next disposal action (4 sampling repeats in total).

1.2.3 Monitoring locations

Profiling of the water column will occur at 12 monitoring sites (Figure 1-1):

- Eight sites within the modelled dredge plume extent;
 - Four near-disposal sites (DIS01, DIS02, DIS03 and DIS04).
 - Four far-disposal sites (DIS05, DIS06, DIS07 and DIS08).
- Four sites beyond the modelled dredge plume extent (background, REF01, REF02, REF03 and REF04).

1.2.4 Analysis

Parameters to be measured are those of Section 7.1.2 of the DSDMP. These include:

- Turbidity (NTU);
- Photosynthetically active radiation (PAR);
- Conductivity;
- Temperature;
- Dissolved Oxygen; and
- Depth

In addition, 48 water samples will be collected at a range of locations and water depths alongside a turbidity sensor **during the first monitoring campaign only** and analysed for TSS concentration. The results from this data will be used to establish a NTU~TSS relationship to infer TSS from future NTU profiling.

1.2.5 Test Narrative

Thresholds for elevated TSS concentrations were developed within the Strategic Proposal for the purpose of mapping spatial zones of influence and impact for the project's dredging and disposal action, with respect to BCH. The thresholds/zones were defined as follows:

- Zone of Influence (ZoI): Elevated TSS at least once (i.e. instantaneous duration threshold).
- Zone of Medium Impact (ZoMI): Elevated TSS continually for 18 days.
- Zone of High Impact (ZoHI): Elevated TSS continually for 90 days.

The modelling suggested that ZoMI or ZoHI would not be formed during the disposal actions. Triggers were established to monitor the accuracy of the modelling predictions. Investigations will be triggered should monitoring infer that a ZoMI may exist, in areas where seagrass has been mapped. Triggers and their responses are outlined in Table 1-1.

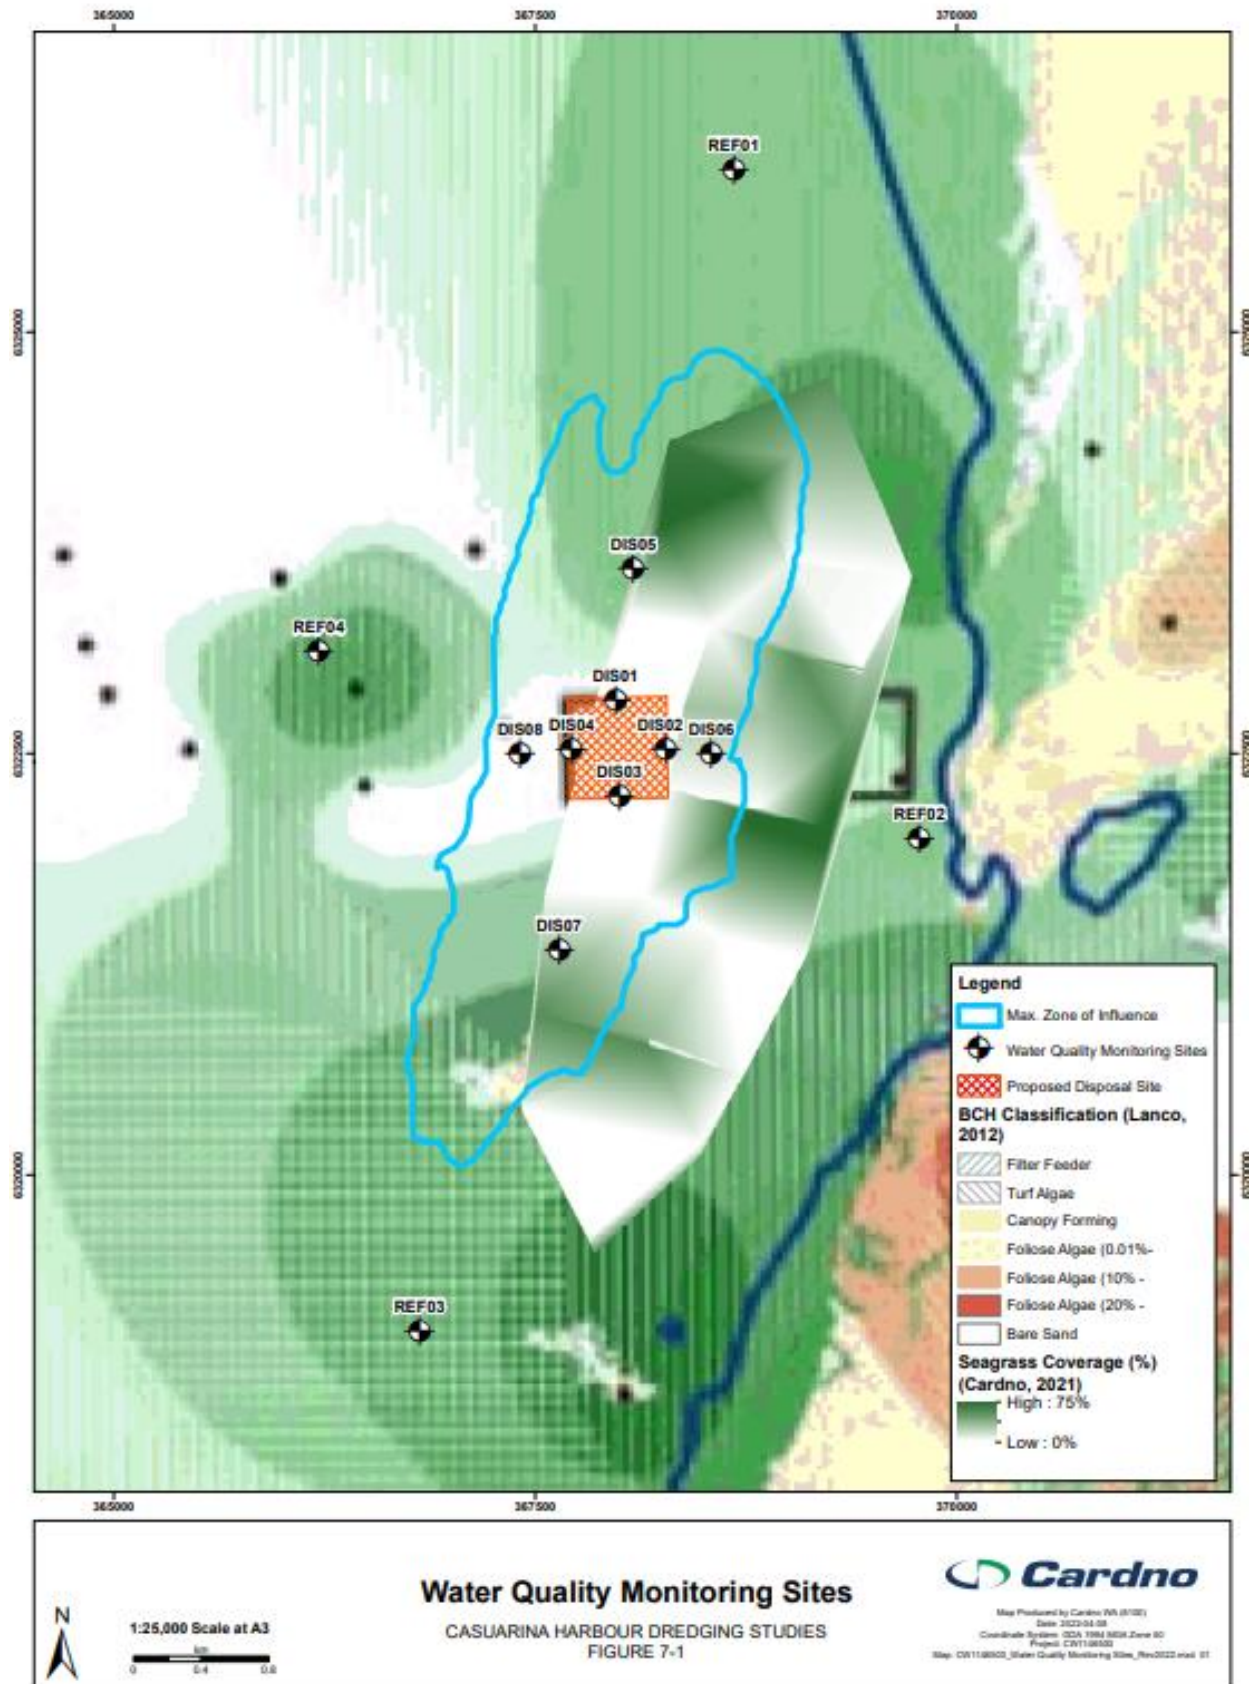


Figure 1-1. DSDMP water quality monitoring locations

Table 1-1. DSDMP triggers, tests and responses

Trigger Level	Test/Threshold	Response
Trigger 1	Depth- and time-averaged (across individual monitoring campaign) TSS concentration (inferred from NTU data) at any of the near disposal monitoring sites (DIS01 to DIS04) is greater than 2 mg/L above average background levels (average of sites REF01-REF04) for a measurement campaign.	Investigate if Trigger 2 has been exceeded for any sites
Trigger 2	Depth- and time-averaged (across individual monitoring campaign) TSS concentration (inferred from NTU data) at any of the far disposal monitoring sites (DIS05 to DIS08) is greater than 2 mg/L above average background levels (average of sites REF01-REF04) for a measurement campaign.	<ul style="list-style-type: none"> • Assess metocean condition data available from BoM and DoT to determine if the exceedance at the site(s) in question is likely to exist for a continuous period of greater than 18 days (e.g. continuous prevailing winds in one direction); • Investigate how the disposal rate during the monitoring campaign compares with historical and planned disposal rates (typical, higher than average, lower than average); • Further investigate light attenuation (PAR profile data) associated with site(s) of elevated TSS to determine if stress may be placed on seagrass, with respect to the light attenuation stress thresholds presented in RPS (2023) for <i>Posidonia</i> and <i>Amphibolis</i> species and PAR at reference sites. This should include temporal assessment of shading across the monitoring campaign, as the plume dissipates (i.e. is the average exceedance prolonged, or due to a short, very high elevation); • Provide a statement as to whether, based on the above, seagrass quality in the vicinity of the disposal site is likely to suffer permanent reduction in quality as a result of the ongoing and proposed disposal schedule. If impact to seagrass quality is predicted, the following actions should be undertaken: <ul style="list-style-type: none"> ○ Dispose in different portion of disposal site; ○ Dispose in certain portions of the site for certain metocean conditions (i.e. 'upstream side'); and ○ Consider additional monitoring campaign to confirm effectiveness of varied placement; and ○ Consider reduction in disposal rate during daylight hours.

1.3 Previous Survey

A summary of the previous disposal monitoring campaign is provided in Table 1-2.

Table 1-2. Previous monitoring campaign summary

Campaign #	Date	Summary
5	15 October 2024	<ul style="list-style-type: none"> No exceedance of TSS triggers.

1.4 Document Purpose

This report provides:

- A summary of the sixth disposal action monitoring campaign data.

In accordance with DSDMP instructions, summary data includes:

- Summary of disposal rates associated with the monitoring campaign;
- Plots and statistical summary of vertical profiling data for all parameters and profiles;
- Identification of any trigger exceedances;
- Assessment of trigger exceedance with respect to potential impacts to seagrass; and
- Recommendation for management should impacts be predicted.

1.4.1 Structure of this Document

The document lists:

- The background to the Project;
- A summary of the DSDMP;
- The monitoring methodology;
- Summary data for the sixth disposal monitoring campaign; and
- Identification of trigger exceedances, assessment of impacts and management recommendations.

The document is current as at the date on the cover page and is referenced as Version 1 (Documents with a lower version number are superseded by this document).

2 METHODOLOGY

2.1 Monitoring Design

The monitoring design implemented was consistent with the prescriptions in Section 7 of the DSDMP (Cardno 2023).

2.1.1 Monitoring locations

During the monitoring campaigns, data was collected from locations as close as possible to the proposed monitoring site coordinates listed in the DSDMP (Cardno 2023), as shown in Figure 1-1.

2.2 Field Procedures

2.2.1 Physical Water Quality

Water quality records (NTU, PAR, conductivity, temperature, dissolved oxygen and depth) were obtained with a calibrated YSI ProDSS multiparameter sonde and Licor-192 Underwater Quantum PAR sensor (see Appendix A for YSI calibration sheet).

The water quality monitoring campaign was carried out on 31 October 2024. All parameters were recorded at a surface (0.5 m), mid-water column (total depth/2) and bottom (1-2 m off the seabed) depth profile at each monitoring site (Figure 1-1). Data collection occurred first at the near-disposal monitoring sites, then the far-disposal sites and finally the reference sites. Data was collected immediately after an individual disposal event at 0945, for four complete sampling rounds at all sites.

2.3 Data Analysis and QA/QC

Data analysis was completed as set out within Sections 7.1.3 and 8.1.3 of the DSDMP. Plots and statistical summary (including mean, median, minimum, maximum, 20th percentile, 80th percentile and standard deviation) of profiling data were calculated as recommended by the DSDMP and derived using either Microsoft Excel 365TM or Statistica 11 (StatSoft Inc 2011).

NTU data was transformed into estimated TSS values using the relationship:

$$\text{TSS} = 1.62 * \text{NTU}$$

QA/QC of physical water quality profile data included manual checks to remove any erroneous entries. For the current monitoring report, no data was removed.

3 DISPOSAL MONITORING CAMPAIGN DATA SUMMARY

3.1 Dredge Disposal Summary

The trailer suction hopper dredge (TSHD), *Modi R*, suspended daily operations for the CBH Proposal on 10 September 2024. The TSHD has completed four additional days of dredging (between 11 and 14 October 2024) since suspending daily operations. In the absence of the TSHD, dredge operations have continued at the Proposal site via an excavator and hopper barge operated by Polaris Marine Group (Polaris).

A summary of the Polaris dredge spoil disposal activities on 31 October 2024 has been provided in Table 3-1. The monitoring campaign commenced immediately after disposal of Load#2 for the day, at 0945hrs.

Table 3-1. Dredge disposal summary for 31 October 2024

Load# for Project	158	159	160	161
Load# for Day	1	2	3	4
Load start time	00:30	05:06	11:10	17:59
Load stop time	02:40	08:47	15:40	21:01
Discharge start time	03:40	09:45	16:41	22:01
Discharge stop time	03:50	10:00	16:51	22:12
Discharge Location	N	33°13.73	33°13.77	33°13 779
	E	115°35.05	115°35.12	115° 34 951
Load Discharge Total (m ³)	180	180	180	180
Daily Discharge Total (m ³)	720			
Project Discharge Total (m ³)	Not Provided			

3.2 Metocean Conditions

Weather conditions on 31 October 2024 were fine and clear. Winds during the sampling period were easterly in the morning, at 10 – 15 kts, became variable (<5 kts) by midday and turned south-westly in the afternoon at 5 – 10 kts. Seas were 1 – 1.5 m. The tidal range for the day was 0.45 m, with low tides of 0.42 m in the early morning and 0.51 m in the early afternoon. There was a 2007hrs high tide of 0.82 m.

3.3 Physical Water Quality

A statistical summary of the disposal campaign vertical profiling data for each monitoring site is provided in Appendix B. Plots of the vertical profiling data are shown in Appendix C where relevant.

3.3.1 Total Suspended Sediments

The depth- and time-averaged estimates of TSS for each monitoring site, and the average of the reference site data, during the monitoring campaign are shown in Table 3-2.

No site reported TSS concentrations >2 mg/L above the average of the reference site data.

Table 3-2. Depth- and time-averaged estimates of TSS (mg/L) for all sites

Near Disposal Sites		Far Disposal Sites		Reference Sites		
Site	TSS (mg/L)	Site	TSS (mg/L)	Site	TSS (mg/L)	Average TSS (mg/L)
DIS-01	0.30	DIS-05	0.22	REF-01	0.20	0.35
DIS-02	0.30	DIS-06	0.32	REF-02	0.60	
DIS-03	0.36	DIS-07	0.20	REF-03	0.23	
DIS-04	0.20	DIS-08	0.22	REF-04	0.36	

Green Cell = TSS threshold concentration (average of REF site data) for the individual monitoring campaign.

Orange Cells indicate TSS at a near disposal site is > 2mg/L above the trigger threshold value (Trigger 1)

Red Cells indicate TSS at a far disposal site is > 2mg/L above the trigger threshold value (Trigger 2).

3.3.2 Turbidity

Mean turbidity was between 0.1 and 0.2 NTU at most monitoring sites (Figure 3-1). Site REF-02 reported the highest mean turbidity at 0.4 NTU. Most sites showed negligible variability (0.1 NTU difference between surface and bottom readings) in NTU through the water column (Appendix C). The exception to this finding was observed at sites DIS-01, DIS-02, REF-02 and REF-04 which showed up to 0.8 NTU difference between surface and bottom samples.

3.3.3 PAR

While light was recorded as PAR, it is best represented as the percentage of surface irradiance (SI(%)) to reflect the strength of the ambient light at the time of measurement. Mean percent surface irradiance (Figure 3-2) was generally consistent across sites with most sites showing a depth-time averaged mean of between ~20 to 25%. The lowest percent surface irradiance (17.7 %) was recorded at the reference site REF-02, which corresponds to the higher turbidity reported at this site.

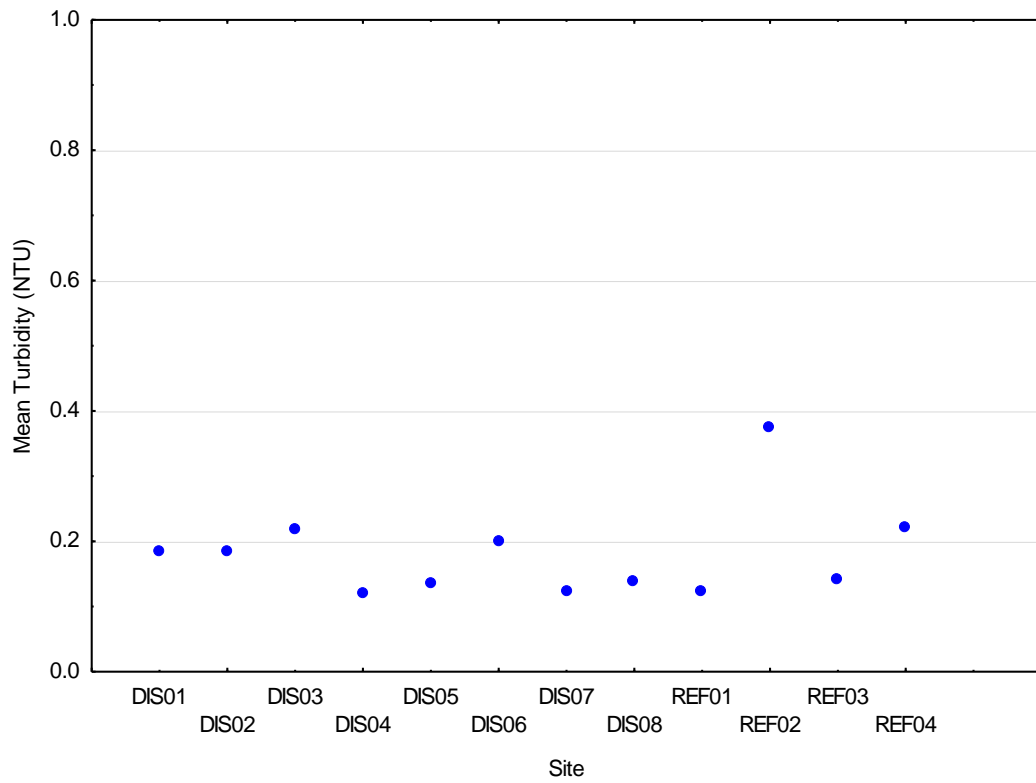


Figure 3-1. Turbidity means (time and depth averaged) at sites in the disposal monitoring campaign.

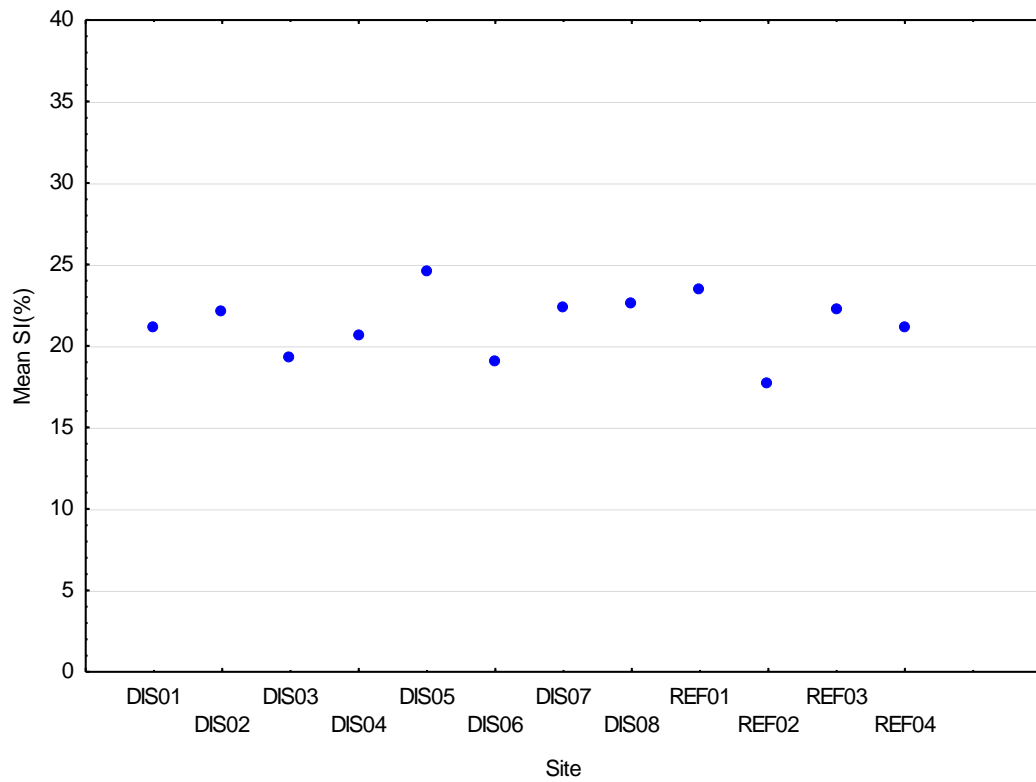


Figure 3-2. Mean percent surface irradiance at sites in the disposal monitoring campaign

3.3.4 Temperature, Conductivity, Dissolved Oxygen

Mean temperature varied by less than 0.3°C across all sites (Appendix B). All monitoring sites showed negligible difference between middle and bottom readings, and little stratification (0.8 °C difference) between surface and bottom samples (Appendix C).

Conductivity showed little variation and little stratification at all sites.

Dissolved oxygen levels suggest waters are generally well oxygenated and quite uniform (including across depth profiles, Appendix C) with a negligible difference in dissolved oxygen levels between surface and bottom readings at all sites. Dissolved oxygen saturation was over 100% in all readings.

4 ASSESSMENT OF TRIGGER EXCEEDANCE AND RECOMMENDATIONS

4.1 Exceedance Investigation

Results presented in Section 3.3.1 (Table 3-2) indicate there was no exceedance of the DSDMP Trigger 1 (>2mg/L above reference) at the near disposal monitoring or Trigger 2 (>2mg/L above reference) at the far disposal monitoring sites. As such, no exceedance investigation was required.

4.2 Response Recommendation

Following the prescriptions of the DSDMP, if impact to seagrass quality is predicted, the following actions should be undertaken:

- Dispose in different portion of disposal site;
- Dispose in certain portions of the site for certain metocean conditions (i.e. 'upstream side');
- Consider additional monitoring campaign to confirm effectiveness of varied placement; and
- Consider reduction in disposal rate during daylight hours.

No impact to seagrass quality is predicted as a result of the present sampling data, as such, none of the above actions require implementation.

5 REFERENCES

Cardno (2023) Dredge Spoil Disposal Management Plan. Casuarina Harbour Dredging Studies. Report: CW1146500, Prepared for Department of Transport, West Perth, WA

RPS (2023) Benthic Communities and Habitat Study. Koombana Bay Marine Structures, Bunbury. Report: AU213001693.004, Prepared for South West Development Commission, Subiaco, Western Australia

StatSoft Inc (2011) STATISTICA (data analysis software system), Version 10.

6 APPENDIX A – YSI CALIBRATION SHEET

**Calibration Report****Multi-Parameter Water Quality Instrument**

Customer: M Science
Contact: Matt

Manufacturer: YSI
Instrument: ProDSS
Serial #: 16G103680
Cable length: 30m (16G102376)

Item	Test	Pass	Comments
Battery	Rechargeable Lithium-Ion		Over 90%
	Battery Saver	✓	Automatically turns off after 30 minutes if not used
Connections	Condition	✓	Good, clean
Cable	Condition	✓	Clean, no tears
Display	Operation	✓	
Firmware	Version	✓	1.2.10
Keypad	Operational	✓	
Display	Screen	✓	
Unit	Condition, seals and O-rings	✓	
Monitor housing	Condition	✓	
pH			
Condition		✓	Good, clean
pH millivolts for pH7 calibration range 0 mV ± 50 mV		✓	
pH 4 mV range + 165 to + 180 from 7 buffer mV value		✓	173.60 mV
pH slope		✓	55 to 60 mV/pH, ideal 59mV 58.7
Response time < 90 seconds		✓	
Calibrated and conforms to manufacturer's specifications		✓	
Conductivity			
Condition		✓	Good, clean
Temperature		✓	°C
Conductivity cell constant 4.5 - 6.5 in GLP file		✓	5.33
Clean sensor reads less than 1 uS/cm in dry air		✓	
Calibrated and conforms to manufacturer's specifications		✓	
Dissolved Oxygen			
Condition		✓	Good, clean
DO sensor in use		✓	Optical
ODO gain in GLP file 0%		✓	(min 0.75 - max 1.50) 0.98
ODO gain in GLP file 100%		✓	(min 0.75 - max 1.50) 0.95
Calibrated and conforms to manufacturer's specifications		✓	

This is to certify that the above instrument has been calibrated to the following specifications:

Parameter	Standards	Reference	Calibration Point	Span	Units	Instrument Readings		
						Before	After	Units
Temperature (23F102023)	Check Temp NATA	Room Temp	17.7	-0.1	°C	NA	17.6	°C
pH (18K105215)	pH 7.00	398528	7.01	-32.50	mV	7.05	7.01	pH
pH (18K105215)	pH 4.00	401033	4.00	141.10	mV	3.87	4.00	pH
Conductivity (23F102023)	2764 µS/cm at 25°C	24/0107	2764	GLP	5.33	2749	2764	µS/cm
Zero Dissolved Oxygen (16G101365)	NaSO3 in distilled water	10175	0.0	0.98	NA	-0.9	0.0	%
100% Dissolved Oxygen (16G101365)	100% Air Saturation	Air	100.0	0.95	uA	104.4	100.0	%
Turbidity (16G103323)	distilled Water	distilled Water	0.00	0	NA	0.15	0.00	NTU
Turbidity (16G103323)	10 NTU	411301	10.00	10	NA	8.69	10.00	NTU
Turbidity (16G103323)	1000 NTU	384011	1000.00	1000	NA	1037	1000.00	NTU

Calibrated by: Gaurav Kanwar

Calibration Date: 29-Sep-24

Next Due: 28-Mar-25

7 APPENDIX B – DETAILED WATER QUALITY STATISTICS BY SITE

Site		Turbidity (NTU)	PAR ($\mu\text{Mol}/\text{m}^2/\text{s}$)	Conductivity (μS)	Temperature ($^{\circ}\text{C}$)	Dissolved Oxygen (%)
DIS-01	N	12	12	12	12	12
	Mean	0.2	350.9	49318	19.1	104.0
	Median	0.1	198.5	49204	19.0	103.9
	Minimum	0.1	82.0	49084	18.9	103.3
	Maximum	0.6	970.0	49991	19.7	105.3
	20th %ile	0.1	84.0	49189	18.9	103.7
	80th %ile	0.2	633.0	49513	19.1	104.3
	Std. Dev	0.1451	325.0612	257.1503	0.2309	0.5485
DIS-02	N	12	12	12	12	12
	Mean	0.2	366.6	49393	19.1	103.8
	Median	0.1	247.5	49245	19.0	103.8
	Minimum	0.1	64.0	49155	18.9	102.7
	Maximum	0.6	899.0	49989	19.7	104.6
	20th %ile	0.1	124.0	49217	19.0	103.6
	80th %ile	0.2	714.0	49592	19.1	104.0
	Std. Dev	0.1446	298.8139	297.0790	0.2314	0.4553
DIS-03	N	12	12	12	12	12
	Mean	0.2	331.4	49407	19.1	104.0
	Median	0.2	128.0	49273	19.0	104.0
	Minimum	0.1	60.0	49221	19.0	102.9
	Maximum	0.5	804.0	49989	19.7	105.4
	20th %ile	0.1	67.0	49226	19.0	103.8
	80th %ile	0.4	753.0	49549	19.1	104.1
	Std. Dev	0.1377	320.9824	273.5954	0.2089	0.5750
DIS-04	N	12	12	12	12	12
	Mean	0.1	334.7	49380	19.1	103.8
	Median	0.1	171.0	49223	19.0	103.7

Site		Turbidity (NTU)	PAR ($\mu\text{Mol}/\text{m}^2/\text{s}$)	Conductivity (μS)	Temperature ($^{\circ}\text{C}$)	Dissolved Oxygen (%)
	Minimum	0.1	88.0	49201	18.9	103.3
	Maximum	0.2	881.0	49906	19.5	104.7
	20th %ile	0.1	111.0	49204	19.0	103.5
	80th %ile	0.2	631.0	49640	19.1	104.4
	Std. Dev	0.0334	290.3763	271.6989	0.1658	0.4697
DIS-05	N	12	12	12	12	12
	Mean	0.1	395.8	49380	19.0	103.6
	Median	0.1	276.0	49175	18.9	103.6
	Minimum	0.1	74.0	49144	18.9	103.0
	Maximum	0.2	975.0	49995	19.6	104.4
	20th %ile	0.1	101.0	49158	18.9	103.3
	80th %ile	0.2	746.0	49919	19.1	103.8
	Std. Dev	0.0387	334.1481	356.8793	0.2038	0.3621
DIS-06	N	12	12	12	12	12
	Mean	0.2	318.7	49441	19.0	103.8
	Median	0.2	160.5	49272	19.0	103.9
	Minimum	0.1	63.0	49180	18.2	103.1
	Maximum	0.4	948.0	50121	19.8	104.5
	20th %ile	0.1	98.0	49234	19.0	103.4
	80th %ile	0.3	526.0	49827	19.1	104.3
	Std. Dev	0.0953	310.8853	324.3879	0.3525	0.4539
DIS-07	N	12	12	12	12	12
	Mean	0.1	376.3	49442	19.1	104.5
	Median	0.1	300.5	49303	19.1	104.5
	Minimum	0.1	63.0	49218	19.0	103.9
	Maximum	0.2	844.0	50113	19.8	105.0
	20th %ile	0.1	115.0	49257	19.0	104.3
	80th %ile	0.2	617.0	49631	19.2	104.9
	Std. Dev	0.0362	283.2311	299.4522	0.2392	0.3397

Site		Turbidity (NTU)	PAR ($\mu\text{Mol}/\text{m}^2/\text{s}$)	Conductivity (μS)	Temperature ($^{\circ}\text{C}$)	Dissolved Oxygen (%)
DIS-08	N	12	12	12	12	12
	Mean	0.1	388.5	49370	19.1	104.0
	Median	0.1	221.0	49237	19.0	104.0
	Minimum	0.1	59.0	49195	18.9	103.6
	Maximum	0.2	910.0	49999	19.6	104.5
	20th %ile	0.1	109.0	49212	19.0	103.9
	80th %ile	0.2	810.0	49502	19.2	104.2
	Std. Dev	0.0426	338.7543	262.3776	0.2193	0.2392
REF-01	N	12	12	12	12	12
	Mean	0.1	354.2	49065	18.9	103.0
	Median	0.1	262.5	48945	18.8	102.9
	Minimum	0.1	67.0	48916	18.8	102.1
	Maximum	0.2	921.0	49751	19.6	103.7
	20th %ile	0.1	118.0	48931	18.8	102.8
	80th %ile	0.2	637.0	49115	19.0	103.3
	Std. Dev	0.0345	281.9916	266.7186	0.2598	0.4621
REF-02	N	12	12	12	12	12
	Mean	0.4	280.4	49557	19.2	104.3
	Median	0.3	199.5	49461	19.2	104.4
	Minimum	0.1	18.0	49307	19.0	103.4
	Maximum	0.9	803.0	50212	19.9	105.2
	20th %ile	0.1	69.0	49345	19.1	103.8
	80th %ile	0.6	467.0	49757	19.4	104.6
	Std. Dev	0.3025	264.6498	280.9851	0.2503	0.5348
REF-03	N	12	12	12	12	12
	Mean	0.1	349.4	49482	19.1	104.8
	Median	0.1	235.5	49390	19.1	104.9
	Minimum	0.1	62.0	49193	18.3	104.0
	Maximum	0.2	984.0	50204	19.9	105.5

Site		Turbidity (NTU)	PAR ($\mu\text{Mol}/\text{m}^2/\text{s}$)	Conductivity (μS)	Temperature ($^{\circ}\text{C}$)	Dissolved Oxygen (%)
	20th %ile	0.1	130.0	49256	19.0	104.4
	80th %ile	0.2	740.0	49649	19.1	105.3
	Std. Dev	0.0469	313.8119	312.4282	0.3460	0.5042
REF-04	N	12	12	12	12	12
	Mean	0.2	325.2	49170	19.0	103.4
	Median	0.1	183.0	49064	18.9	103.5
	Minimum	0.1	61.0	49026	18.8	102.4
	Maximum	0.9	923.0	49966	19.7	104.2
	20th %ile	0.1	111.0	49039	18.8	103.0
	80th %ile	0.2	588.0	49284	19.1	103.9
	Std. Dev	0.2438	295.2117	268.9907	0.2535	0.5248

8 APPENDIX C – VERTICAL PROFILES

